


Rainwater Harvesting with the Li-Lo underground tank

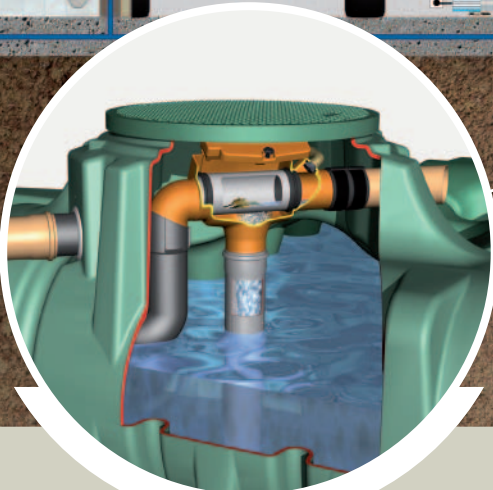

Picture shows an example of the garden package complete

SUPRA internal filter

- Provides over 95% water yield
- Self cleaning filter
- Space saving filter technology inside the tank
- Can manage roof areas up to 350 sqm
- Stainless steel filter insert 0.35mm

Garden Tank and Filter Package

Scope of supply:

- Garden Tank, plus
- Supra Filter package (0.35 mm stainless steel mesh filter system- self cleaning)

Garden Package Complete

Scope of supply:

- Garden Tank and Filter Package, plus
- Stainless steel submersible pump and automatic rainwater controller (watermark approved)

Sizes shown are approximate sizes. Capacities listed are approximate maximum volumes. Specifications are subject to change. * Conditions Apply.

DALBY
MS 1116 Warrego Highway
Dalby Qld 4405
P (07) 4660 6800

BATHURST
1 Cardiff Place
Bathurst NSW 2795
P (02) 6334 2720

MOAMA
2 Dawson Street
Moama NSW 2731
P (03) 5480 0900

www.clarktanks.com.au

Li-Lo Flat Rainwater Tanks

The Li-Lo tank series for shallow excavation!



2 friends



2 spades



1 morning

How do you install a tank?

It's as easy as 1, 2, 3.


CLARK
TANKS
FAR BETTER BY DESIGN

GARANTIA®



Technical data

Measurements/weights	1500 l 330 Gal	3000 l 660 Gal	5000 l 1100 Gal
Length [l]	2100 mm (82,6")	2450 mm (49,2")	2890 mm (113,77")
Width [w]	1250 mm (49,2")	2100 mm (82,67")	2300 mm (90,55")
Height of tank shoulder [h]	700 mm (27,5")	735 mm (28,9")	950 mm (37,4")
Height of dome collar [hd]	315 mm (12,4")	315 mm (12,4")	315 mm (12,4")
Ø inlet [e]	650 mm (25,96")	650 mm (25,96")	650 mm (25,96")
Ø tank dome [d]	800 mm (31,49")	800 mm (31,49")	800 mm (31,49")
Weight approx.	80 kg	170 kg	240 kg

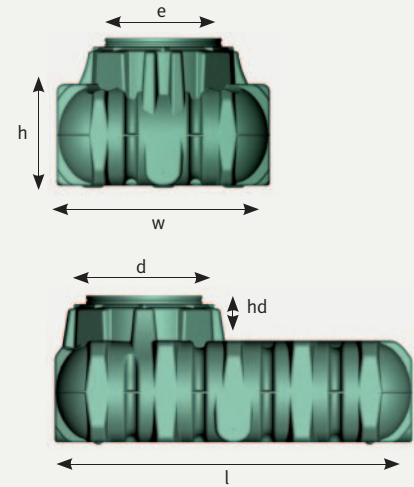

75 % less digging compared with a concrete cistern.

Save more than 100 wheelbarrow loads of soil!




The perfect solution

- ✓ Patented technology!
- ✓ State of the art rain water harvesting technology
- ✓ Amazing German engineered underground tank system
- ✓ Stunning technology with self cleaning filter
- ✓ Simple to install – very low maintenance



Tank only packages

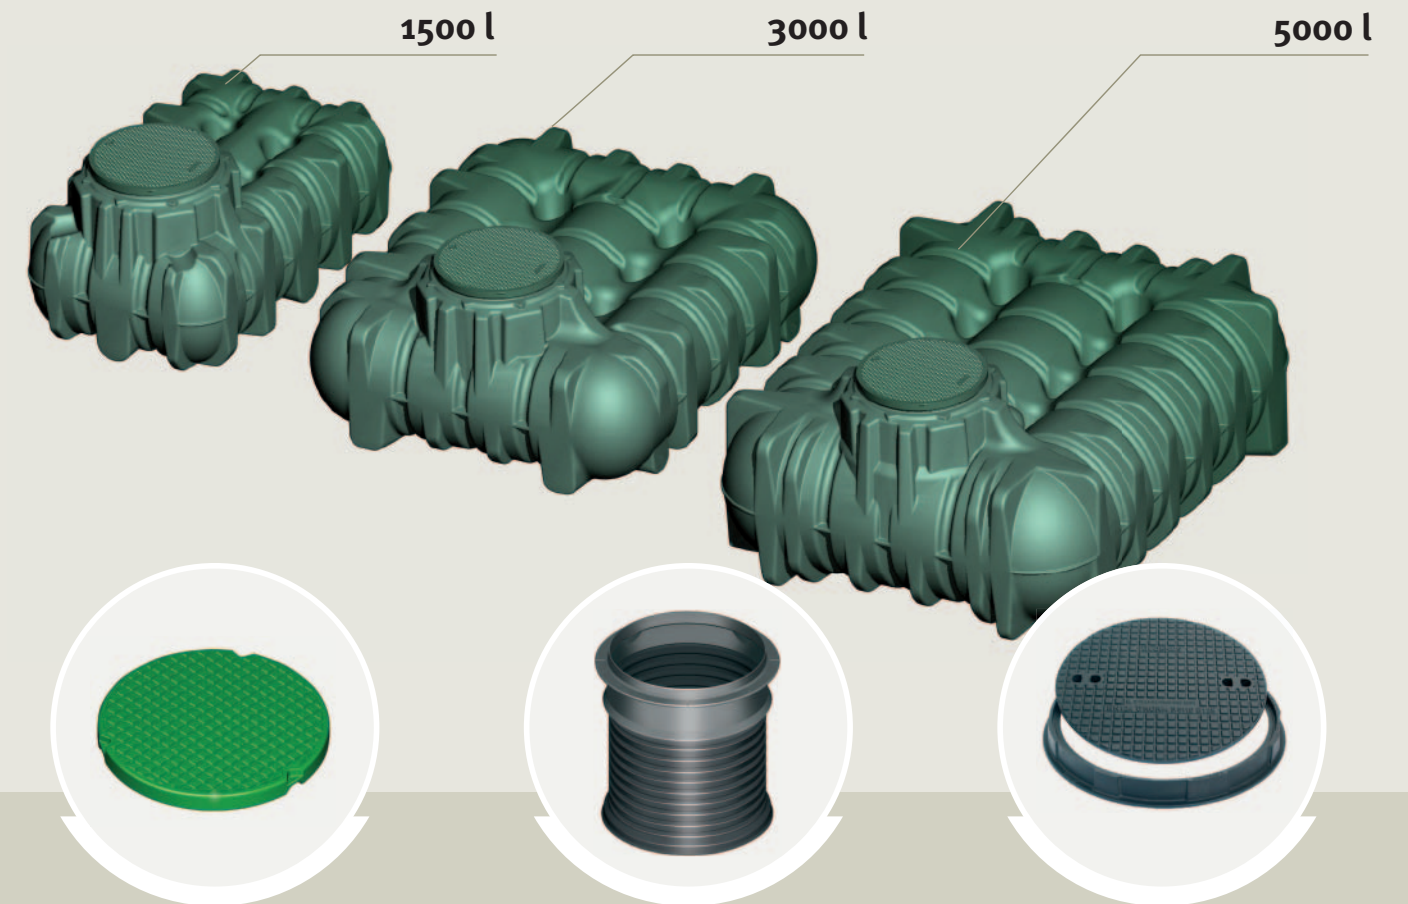


*Includes PE lid:
PE lid double-walled
with childproof lock
Colour: grass green
Ø 70 cm.

Accessory:
The perfect tank covering
The standard Li-Lo telescopic dome shaft
can be telescoped and shortened in a
continuously variable manner. Ø 60 cm,
adjustable from 22-55 cm.

Accessory:
Car module
Class B125/DIN EN 124 (in combination
with Li-Lo telescopic dome shaft),
consisting of cast cover with a Ø of 69 cm
and cast frame with a Ø of 78 cm.

Rainwater Harvesting with the Li-Lo underground tank

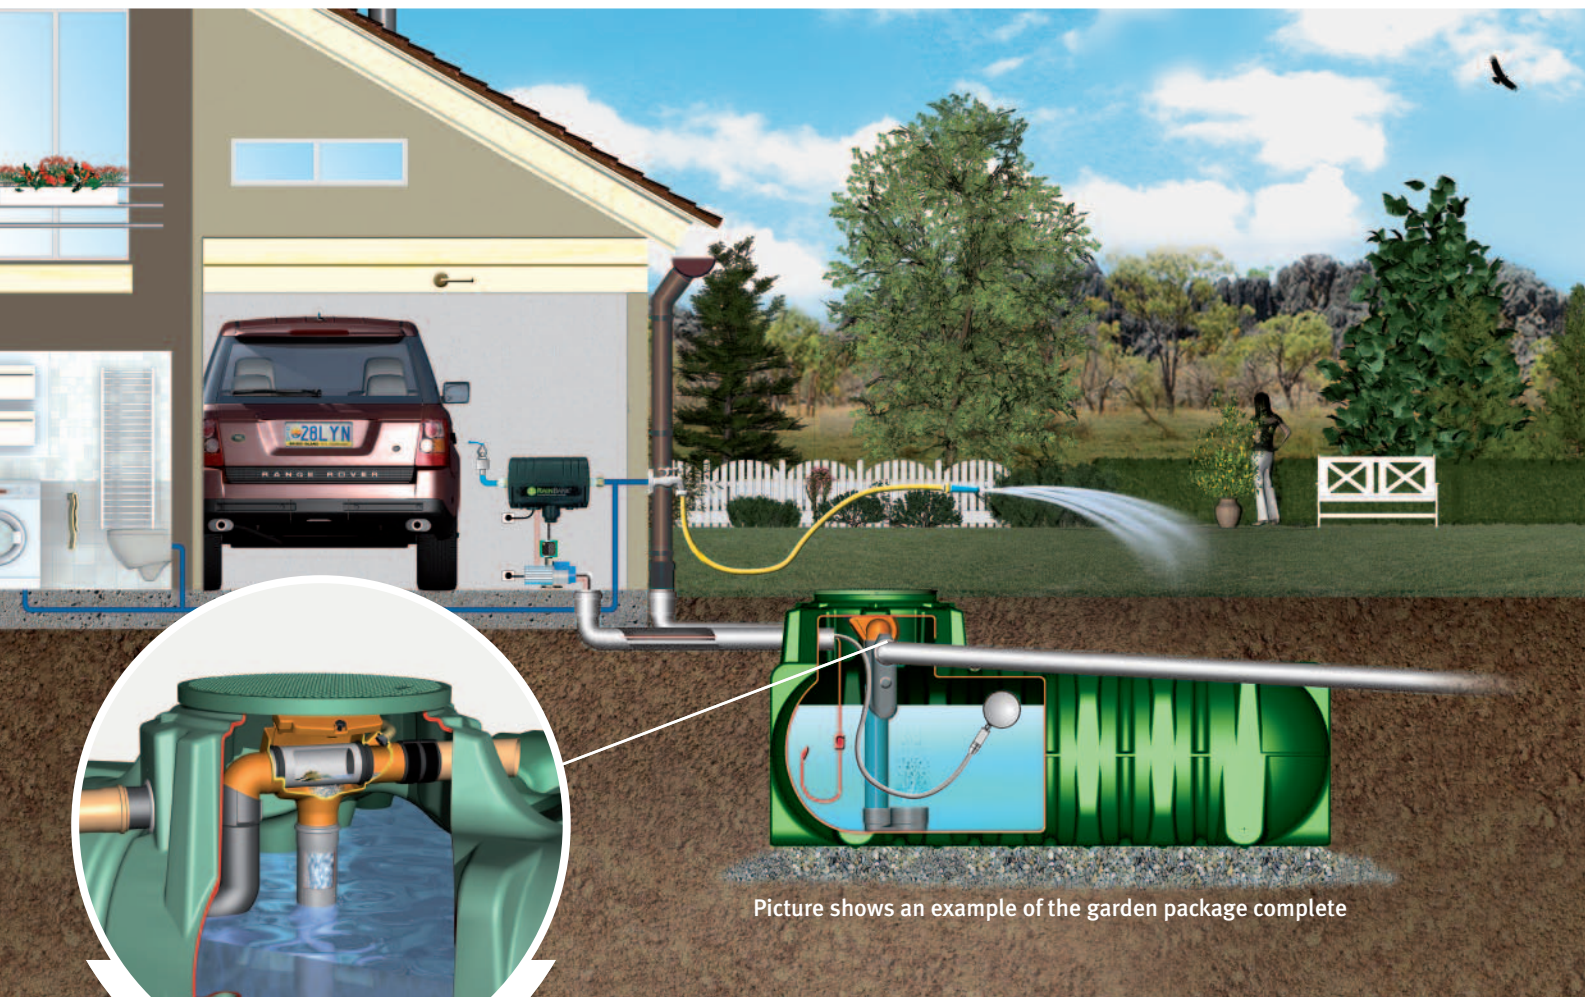

Picture shows an example of the garden package complete

SUPRA internal filter

- Provides over 95% water yield
- Self cleaning filter
- Space saving filter technology inside the tank
- Can manage roof areas up to 350 sqm
- Stainless steel filter insert 0.35mm

Garden Tank and Filter Package

Scope of supply:

- Garden Tank, plus
- Supra Filter package (0.35 mm stainless steel mesh filter system- self cleaning)

Garden Package Complete

Scope of supply:

- Garden Tank and Filter Package, plus
- Stainless steel submersible pump and automatic rainwater controller (watermark approved)

Sizes shown are approximate sizes. Capacities listed are approximate maximum volumes. Specifications are subject to change. * Conditions Apply.

AYR
25 Bird Street, Ayr Qld 4807
P (07) 4783 9599

www.tanksdirect.com.au

Li-Lo Flat Rainwater Tanks

The Li-Lo tank series for shallow excavation!



2 friends



2 spades



1 morning


How do you install a tank?

It's as easy as 1, 2, 3.




Technical data


Measurements/weights	1500 l 330 Gal	3000 l 660 Gal	5000 l 1100 Gal
Length [l]	2100 mm (82,6")	2450 mm (49,2")	2890 mm (113,77")
Width [w]	1250 mm (49,2")	2100 mm (82,67")	2300 mm (90,55")
Height of tank shoulder [h]	700 mm (27,5")	735 mm (28,9")	950 mm (37,4")
Height of dome collar [hd]	315 mm (12,4")	315 mm (12,4")	315 mm (12,4")
Ø inlet [e]	650 mm (25,96")	650 mm (25,96")	650 mm (25,96")
Ø tank dome [d]	800 mm (31,49")	800 mm (31,49")	800 mm (31,49")
Weight approx.	80 kg	170 kg	240 kg

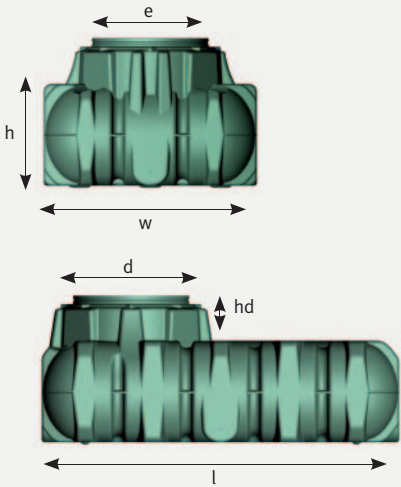

75 % less digging compared with a concrete cistern.
Save more than 100 wheelbarrow loads of soil!

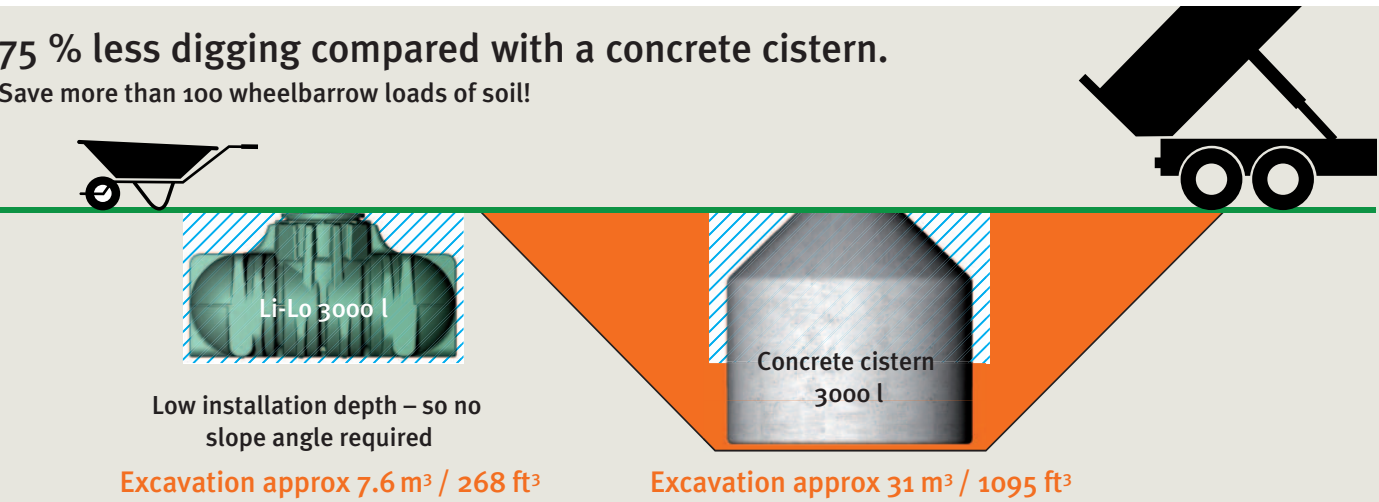

Tank only packages

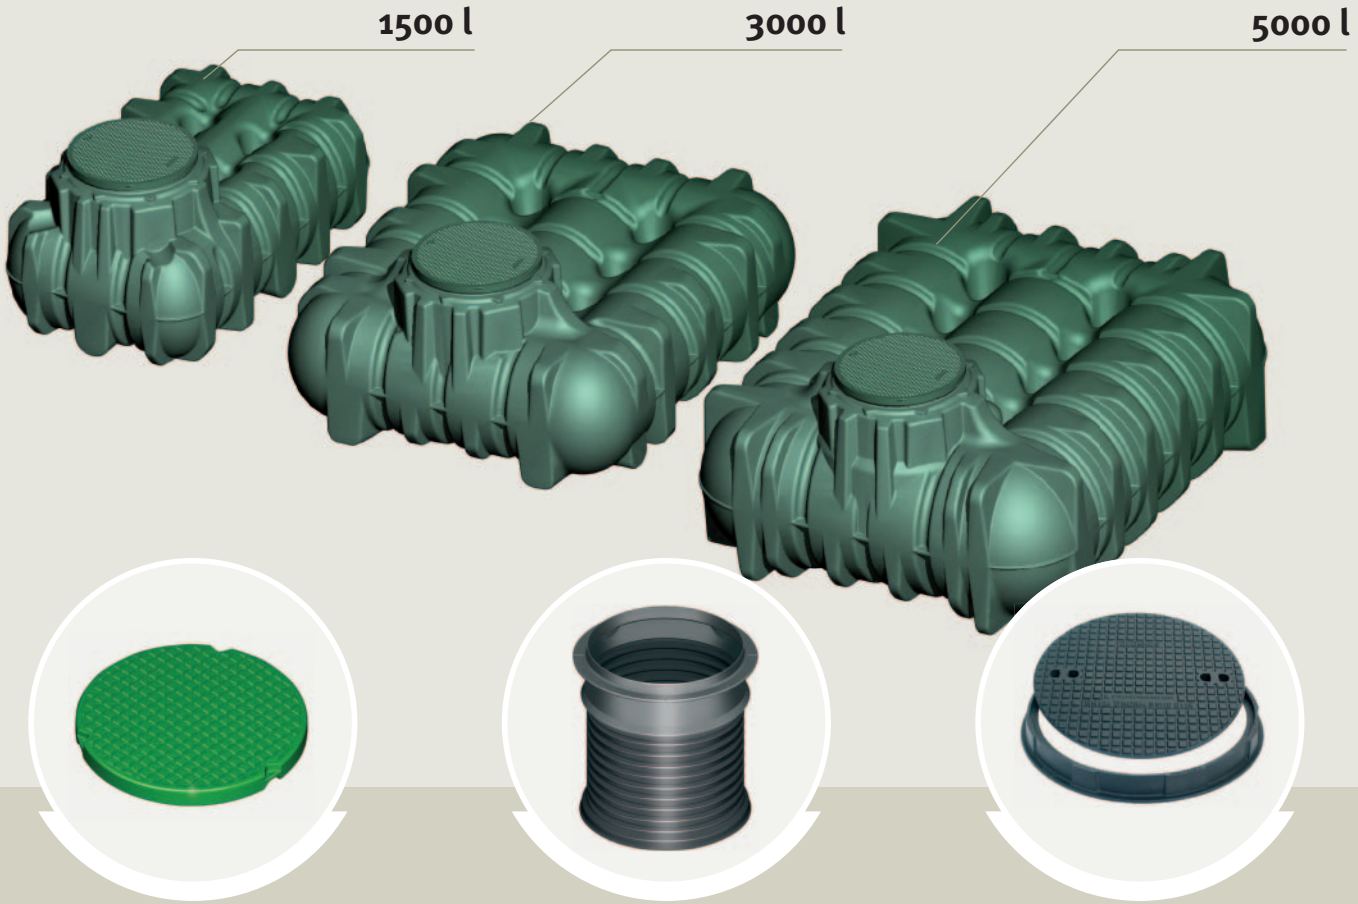

*Includes PE lid:
PE lid double-walled
with childproof lock
Colour: grass green
Ø 70 cm.

Accessory:
The perfect tank covering
The standard Li-Lo telescopic dome shaft
can be telescoped and shortened in a
continuously variable manner. Ø 60 cm,
adjustable from 22-55 cm.

Accessory:
Car module
Class B125/DIN EN 124 (in combination
with Li-Lo telescopic dome shaft),
consisting of cast cover with a Ø of 69 cm
and cast frame with a Ø of 78 cm.

The perfect solution

- ✓ Patented technology!
- ✓ State of the art rain water harvesting technology
- ✓ Amazing German engineered underground tank system
- ✓ Stunning technology with self cleaning filter
- ✓ Simple to install – very low maintenance

